


**BRIDES FML OVALES
EN BRONZE
TARAUDÉE
74300 A 74312**

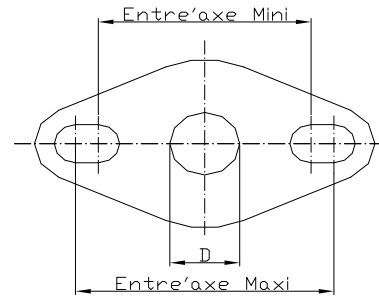

Caractéristiques:

Bride FML ovale taraudée
Utilisation pour conduite fer

Matière :

Bronze UE5



Tableau des dimensions et poids

Référence	DN	Entraxe mini-maxi	Désignation	Poids (kg)
74300	20	65-88	Taraudée 1/2"	0,345
74301	20	65-88	Taraudée 3/4"	0,295
74302	20	65-88	Taraudée 1"	0,250
74303	20	65-88	Taraudée 1"1/4	0,215
74300A	20	65-88	Taraudée 1"1/2	0,180
74310	40	95-112	Taraudée 1"1/4	0,610
74311	40	95-112	Taraudée 1"1/2	0,590
74312	40	95-112	Taraudée 2"	0,495